

BEIJING SIFANG AUTOMATION CO., LTD


SIFANG® is registered trademark of Beijing Sifang Automation Co., Ltd.

We reserve all rights to this document, even in the event that a patent is issued and a different commercial proprietary right is registered. Improper use, in particular reproduction and dissemination to third parties, is not permitted.

This document has been carefully checked. If the user nevertheless detects any errors, he is asked to notify us as soon as possible.

The data contained in this manual is intended solely for the product description and is not to be deemed to be a statement of guaranteed properties. In the interests of our customers, we constantly seek to ensure that our products are developed to the latest technological standards as a result; it is possible that there may be some differences between the hardware/software product and this information product.

Manufacturer: Beijing SIFANG Automation Co., Ltd.
Email: support@sf-auto.com
Website: http://www.sf-auto.com
Add: No.9, Shangdi 4th Street, Haidian District, Beijing, P.R.C.100085

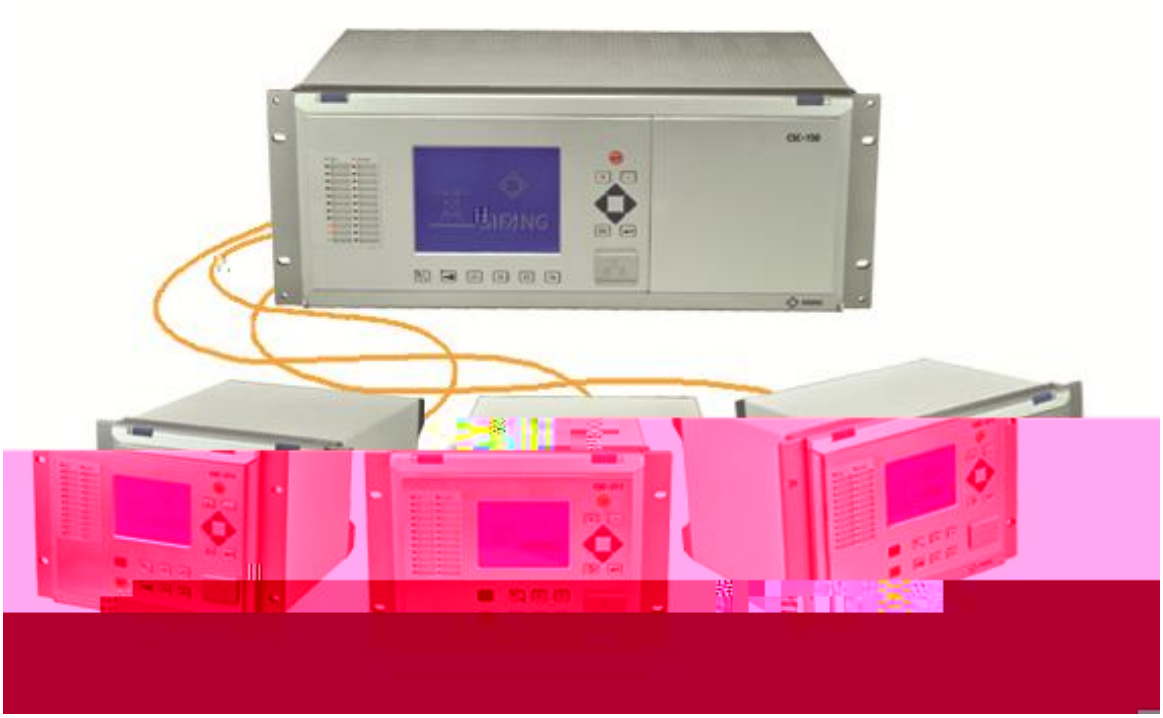

Comprehensive functionality including phase segregated low-impedance current differential protection, breaker failure protection, overcurrent protection, earth overcurrent protection and dead zone protection, etc.

Voltage blocking is an option for the current differential protection and breaker failure protection, which will improve reliability of current differential protection and breaker failure protection


With CT circuit supervision function, once CT circuit failure is detected, the user can choose CT failure alarm or discrimination zone differential protection blocking

With the disconnector position status monitor and memory function, the device will delay the alarm and operate according to the original normal state

LCD can display real-time main wiring diagram, the status of each breaker and disconnector, current and power flow, etc.

Bay unit CSC-211 works in the distributed busbar protection system, also as feeder backup protection IED

Robust hardware with excellent EMC performance and IP54 protection under -40 to +70 operating temperature

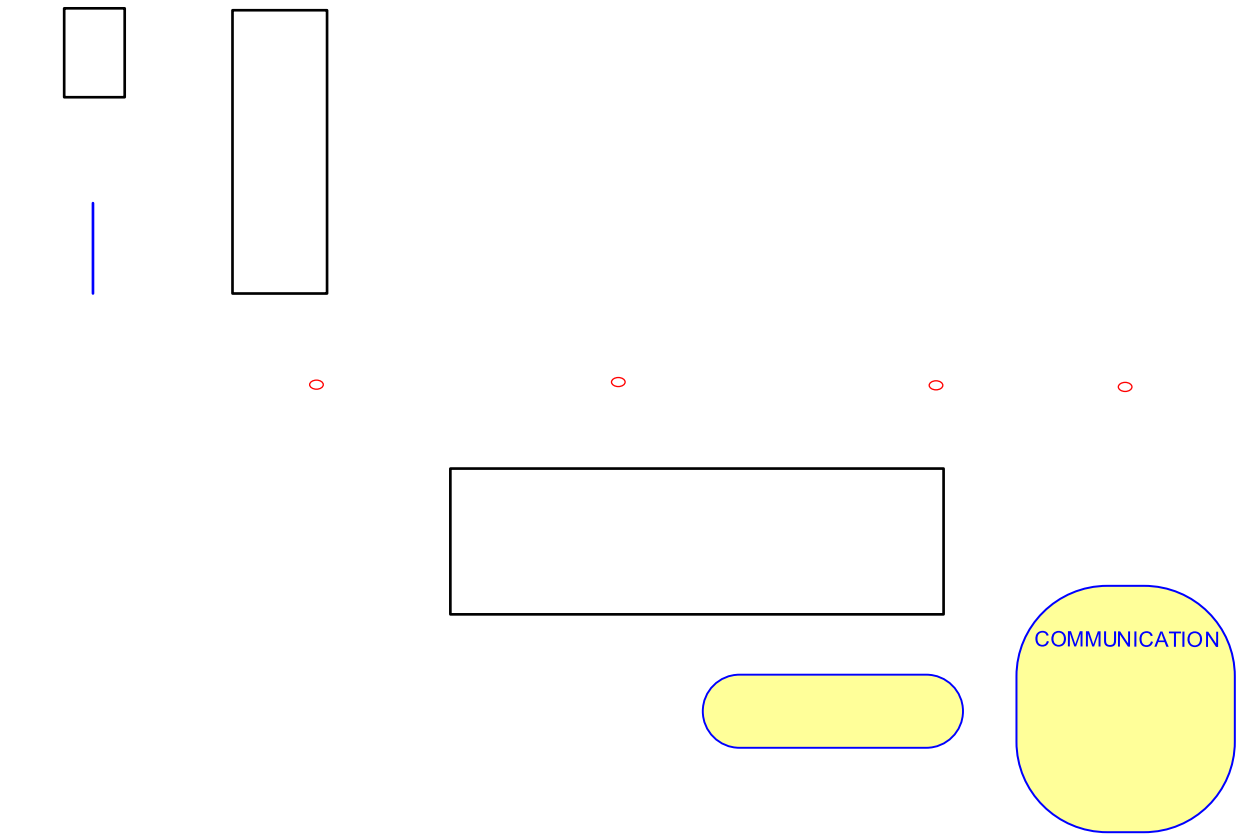
COMMUNICATION

	Up to 6 AC current inputs in the section or coupler bay unit, 3 AC current inputs in other bay units, 1/5 A compatible
	Up to 9

	transformer ports; Input and output ports; Communication ports; Time port; Enclosure earth port;

